

Vario series – Pneumatic clamps for line production in the body assembly

- Stepless adjustable opening angle:
5-135°
- No specification of opening angles necessary
- Easier accessibility of opening angle adjustment
- Smaller interfering contour with size 63
- More precise Target / more precise switch point by improved switch lug in size 50/63
- Established in fixture building since 2011



Opening angle adjustable 5-135°


- Easy adjusting of opening by turning the piston rod from 5-135°
- The adjustable opening angle can be read on the engraved angle scale at the outside
- One locking screw



- Cylinder in oval profile with integrated cushioning in end position



- Main drive shaft supported by needle bearing

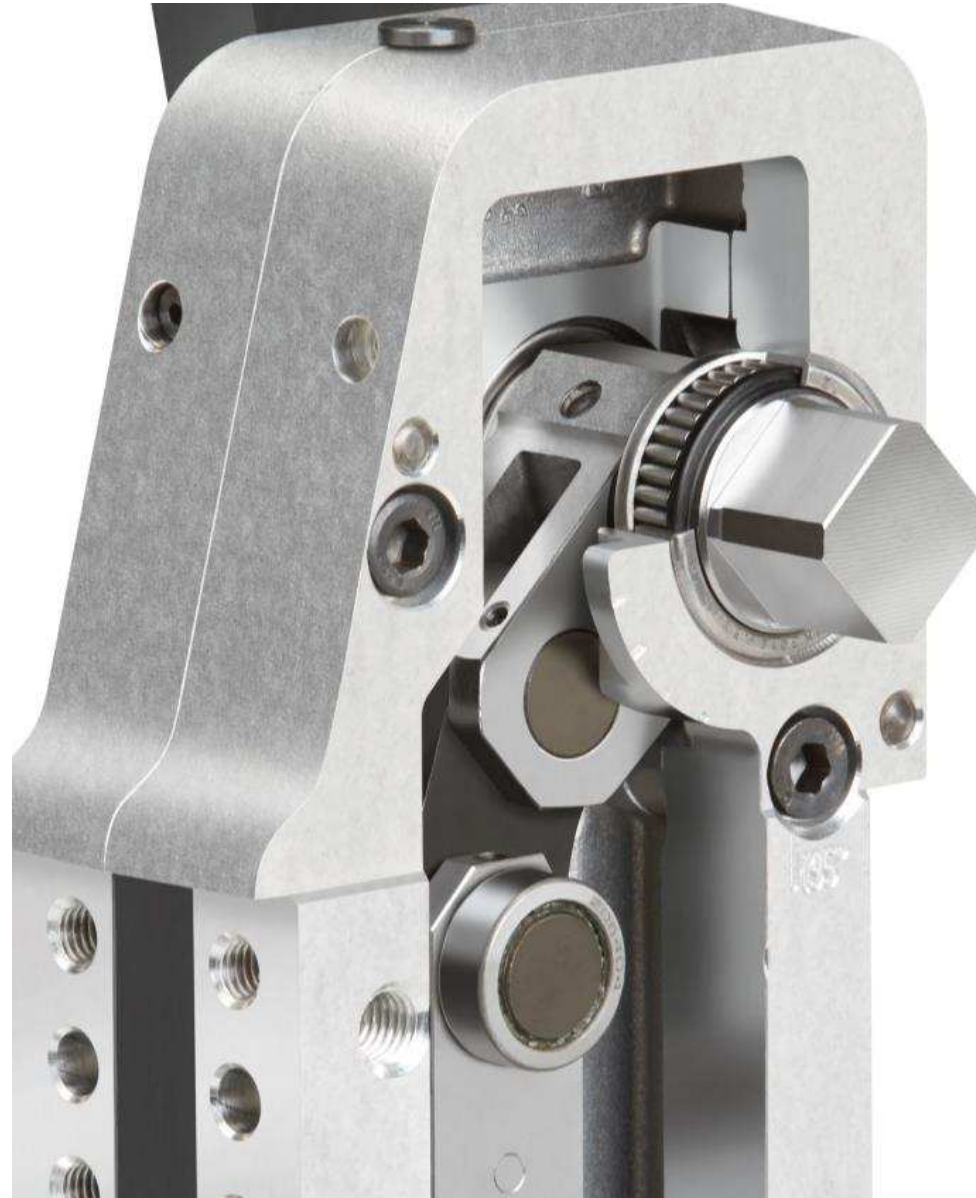

- Release Pin to unlock clamp without air



- Stepless adjustable opening angle 5-135°
- Integrated cushioning in end position
- Optimal drive shaft

- Advantages Vario Clamp V... BR2 towards BR1
 - Only one clamp!
 - Reduction of variants in stock
 - Optimized housing and interfering contour

Thank you for your attention

TÜNKERS Maschinenbau GmbH
Christian Eickhoff
Am Rosenkothen 4-12
40880 Ratingen

Telefon +49 (0) 2102-45 17-290
Telefax +49 (0) 2102-45 17-9999

E-Mail christian.eickhoff@tuenkers.de
Internet www.tuenkers.de

